





# PALLET DOLLY

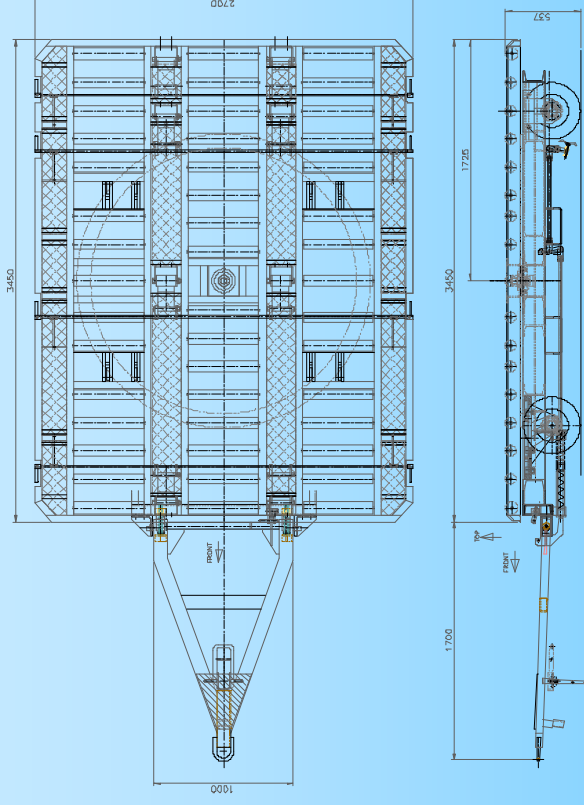

# PALLET DOLLY

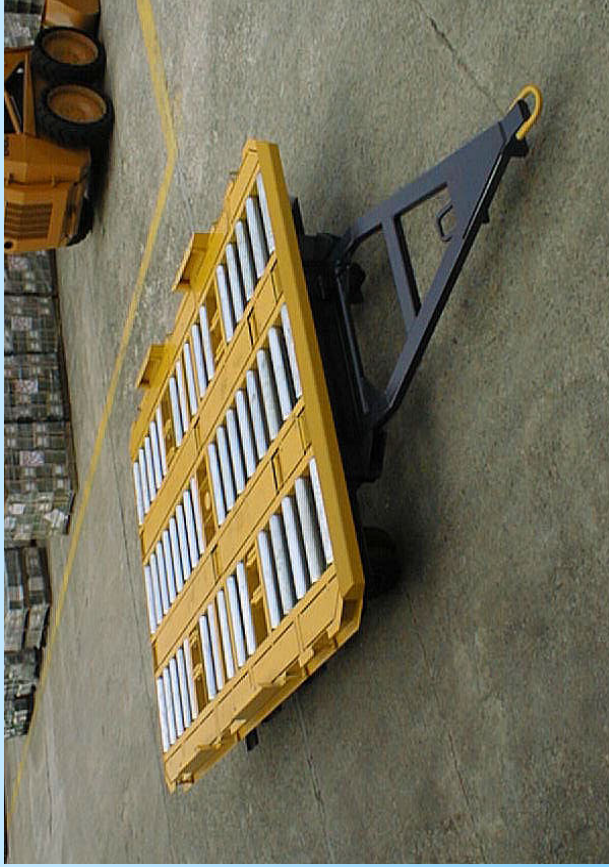

## GENERAL

The AEREX pallet dollies specifications are for a standard version. Pallet Dollies can be tailored to meet individual requirement.

The pallet dollies are used for transportation of unitized cargo with a minimum payload of 7000kg.

The dolly is rugged and is suitable and treated for outdoor use.

It is capable of handling LDs ranging from LD1 to LD10.

The construction of the dolly is from steel frames fitted with gravity rollers. Locking of pallets and LDs are by means of butterfly locks and side restrains.

The front wheels are of swiveled type and rear fixed. Steering is done through the 2 front swivel wheels maintaining identical tracking when being towed.



## TECHNICAL DATA FOR AEREX PALLET DOLLEY

	SPECIFICATION
Unladen Weight Payload	1,000 kg (approx.) 2,500 kg
Steering System	Tow bar on ball race type turn able
Towing Speed	40 km/h
Parking Brakes	Tow bar actuated
Overall Dimensions: ● Length ● Width ● Height	2,473 mm 1,575 mm 1,905 mm
Minimum Towing Height	30 mm from ground
Tyre (U-Lug)	Pneumatic Tyres

**UMW ADVANTECH SDN. BHD.**

**AEREX GSE – Sales, Marketing & Manufacturing**

**Jalan Utas 15/7, 40915 Shah Alam,**

**Selangor, MALAYSIA.**

**Tel: +603 5163 5000**

**Fax: +603 5510 4381**

**Website: [www.umw-advantech.com](http://www.umw-advantech.com)**

